Lamps

CATALOGUE

Examination lamps / Reading lamps

Whether in the examination room, intensive care or at the patient's bedside –

provita lamps illuminate always what is important:

the health and well-being of people.

The right choice for bright light and glare-free illumination.

provita

The provita lamp series

efficient

flexible

glare-free

We offer state-of-the-art solutions for a variety of applications

06

Series 1

Examination lamp LED,
halogen and twin version

14

Series 2

Small LED and
halogen examination/
reading lamp

18

Series 3

Reading lamp
with LED

22

Series 4

Small
LED and halogen
reading lamp

28

Series 5

Large
examination lamp
with LED central reflector

32

Series 6

Elegant
LED reading lamp

36

Accessories

For all
lighting systems

Series 1

All around examination lamp

The right choice for bright light and glare-free illumination.

LED
Perfectly focused illumination

Light output	> 55,000 Lux / 500 mm
Light colour	approx. 4,300 K ±200
Light field diameter D10	100 mm at 500 mm
Electrical mains	100 – 240 V, 50 – 60 Hz

HALOGEN
The economical alternative

Light output	approx. 28,500 Lux / 500 mm
Light colour	approx. 3,000 K
Light field diameter D10	90 mm at 500 mm
Electrical mains	230 V, 50 – 60 Hz



TWIN VERSION
Switch between examination lamp and reading lamp

Light output	approx. 28,500 Lux / 500 mm (examination lamp), approx. 2,500 Lux / 500 mm (reading lamp)
Light colour	approx. 3,000 K
Light field diameter D10	90 mm at 500 mm (examination lamp), 350 mm at 500 mm (reading lamp)
Electrical mains	230 V, 50 – 60 Hz

impact resistant housing

high control comfort

LED technology
Made in Germany

ideal hygiene properties (wipe disinfection)

Made in Germany

Upon request: Dimmer / international plug / 110 V version
Many mounting options and further accessories starting on page 36.

GOOSENECK ARM LAMP
Flexible positioning

Working radius	approx. 800 mm
Total weight	approx. 2.6 kg
Fixture pin	Ø 18, L 35 mm

With spring balance joint

LED	L100041A

Without spring balance joint

LED	L100011A
Halogen	L100005A
Twin version	L100006A

DOUBLE-JOINT ARM LAMP
Large projection

Working radius	approx. 1,100 mm
Total weight	approx. 2.9 kg
Fixture pin	Ø 18, L 35 mm

With spring balance joint

LED	L100081A
Halogen	L100080A
Twin version	L100082A

Without spring balance joint

Halogen	L100061A
Twin version	L100064A

JOINT ARM LAMP
Simple and save

Working radius	approx. 800 mm
Total weight	approx. 2.8 kg
Fixture pin	Ø 18, L 35 mm

With spring balance joint

LED	L100031A
Halogen	L100030A
Twin version	L100032A

Without spring balance joint

LED	L100024A
Halogen	L100020A
Twin version	L100019A

For technical data see provita.de

precise in
handling

Pole
(S000803A)
see accessories
p. 36

Stand
(S011820A)
see accessories
p. 36

MOBILE LAMP ON A FIXED-HEIGHT STAND
Versatile and stable

Pole height with base	approx. 1080 mm
Total weight	approx. 7.8 kg
Fixture pin	Ø 18, L 35 mm

Gooseneck arm

LED	L111111A
Halogen	L111105A
Twin version	L111106A

Spring balance gooseneck arm

LED	L111141A
Halogen	L111141A
Twin version	L111136A

Double-joint arm

Halogen	L111161A
Twin version	L111164A

Spring balance double-joint arm

LED	L111181A
Halogen	L111180A
Twin version	L111182A

Joint arm

LED	L111124A
Halogen	L111120A
Twin version	L111119A

Spring balance joint arm

LED	L111131A
Halogen	L111130A
Twin version	L111132A

MOBILE LAMP ON A HEIGHT-ADJUSTABLE STAND
Flexible and height adjustable

Working radius	approx. 800 mm
Total weight	approx. 10.6 kg
Fixture pin	Ø 18, L 35 mm

Gooseneck arm

LED	L121111A
Halogen	L121105A
Twin version	L121106A

Spring balance gooseneck arm

LED	L121141A
Halogen	L121135A
Twin version	L121135A

Double-joint arm

LED	L121171A
Halogen	L121161A
Twin version	L121164A

Spring balance double-joint arm

LED	L121181A
Halogen	L121180A
Twin version	L121182A

Joint arm

LED	L121124A
Halogen	L121120A
Twin version	L121119A

Spring balance joint arm

LED	L121131A
Halogen	L121130A
Twin version	L121132A

CHILDREN LAMP
Bright colours illuminate the stay

Working radius	approx. 800 mm
Total weight	approx. 7.8 kg
Fixture pin	Ø 18, L 35 mm

Halogen L111120K

For further children infusion stands,
see INFUSION STAND catalogue and/or at provita.de

For technical data
see provita.de

Please order cover separately

WALL MOUNTED LAMP
Space saving

Pivoting radius of lamp	approx. 1,100 mm
Total weight	approx. 3.2 kg
Angle of rotation	approx. 330°

LED	L140080A
Halogen (switch is in handle)	L140066A

CEILING MOUNTED LAMP
Maximum ground clearance

Pivoting radius of lamp	approx. 1,100 mm
Total weight	approx. 6.7 kg / 7.2 kg / 7.7 kg
Angle of rotation	approx. 370°
Length of ceiling stem	500 mm / 750 mm / 1,000 mm

For 2.5 m room height

LED	L125080A
Halogen (switch is in handle)	L125067A

For 2.7 m room height

LED	L127080A
Halogen (switch is in handle)	L127067A

For 3.0 m room height

LED	L130080A
Halogen (switch is in handle)	L130067A

optional:
110 V version / twin version

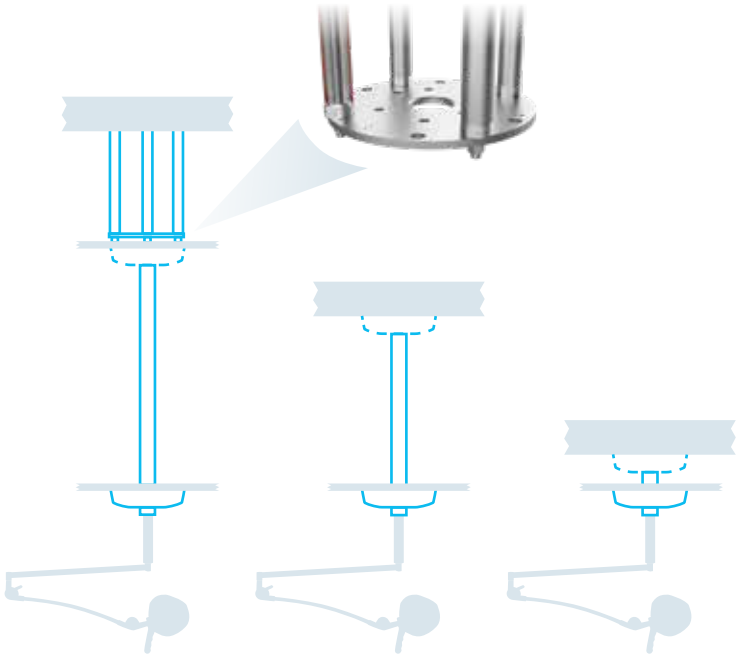

COVER FOR CEILING LAMP

Cover for Series 1

Diameter 320 mm

Z2K0679A

SUBSTRUCTURE FOR CEILING MOUNTING

Also for suspended ceilings

With our substructure you have the possibility to connect our lamps of the series 1 & 5 to almost every ceiling. The type of fastening must be determined by the customer.

Our product consultants and technicians will be glad to assist you in clarifying all technical details.

+49 (0) 21 93 / 51 05 - 0

Please order ceiling mounting plates & cover separately.

For technical data see provita.de

Series 2

The decent examination & reading lamp

Compact solution for variable use.

LED
Highly efficient & perfectly focused

Light output	> 23,300 Lux / 500 mm
Light colour	approx. 4,000 K
Light field diameter D10	220 / 425 mm at 500 / 1,000 mm
Electrical mains	90 – 260 V, 50 – 60 Hz

HALOGEN
Proven & brilliant

Light output	approx. 21,500 Lux / 500 mm
Light colour	approx. 3,000 K
Light field diameter D10	140 / 340 mm at 500 / 1,000 mm
Electrical mains	230 V, 50 – 60 Hz

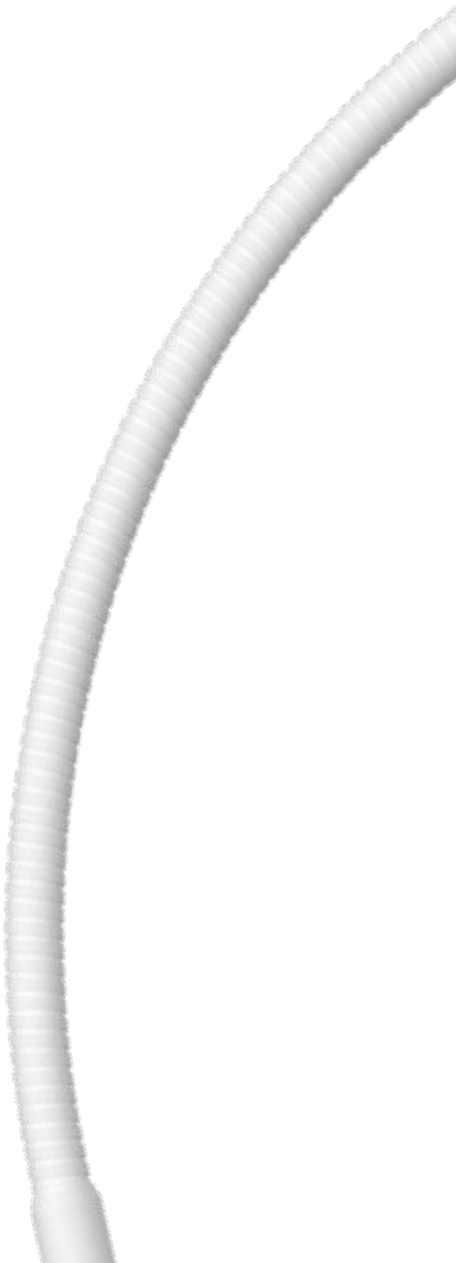

+ compact & robust

+ for rail, stand and pole

+ ideal hygiene properties (wipe disinfection)

Made in Germany

Upon request: Dimmer / international plug / 110 V version
Many mounting options and further accessories starting on page 36.

DOUBLE-JOINT ARM LAMP
Large projection

Projection of the lamp	approx. 1,100 mm
Total weight	approx. 2.45 kg
Fixture pin	Ø 18, L 35 mm

With spring balance joint

LED	L210215A
Halogen	L210211A

Without spring balance joint*

LED	L210216A
Halogen	L210212A

GOOSENECK ARM LAMP
Flexible positioning

Projection of the lamp	approx. 800 mm
Total weight	approx. 2.2 kg
Fixture pin	Ø 18, L 35 mm

LED	L220216A
Halogen	L220212A

*** With the spring balance joint, the lamps are positioned even more comfortably.**

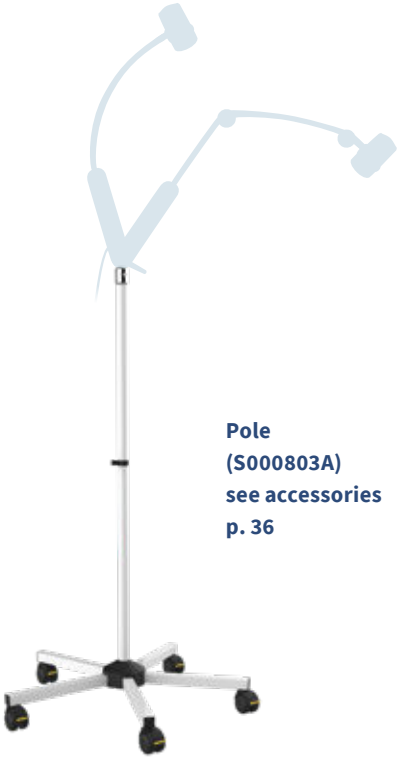

Pole
(S000803A)
see accessories p. 36

MOBILE LAMP ON A FIXED-HEIGHT STAND
Versatile and stable

Projection of the lamp	approx. 800 mm
Total weight	approx. 7.5 kg
Fixture pin	Ø 18, L 35 mm

Stand with gooseneck arm

LED	L220226A
Halogen	L220222A

Stand with double-joint arm

LED	L210226A
Halogen	L210222A

Stand with spring balance double-joint arm*

LED	L210225A
Halogen	L210221A

Stand
(S011820A)
see accessories p. 36

MOBILE LAMP ON A HEIGHT-ADJUSTABLE STAND
Flexible and height adjustable

Projection of the lamp	approx. 800 mm
Total weight	approx. 7.5 kg
Fixture pin	Ø 18, L 35 mm

Stand with gooseneck arm

LED	L220236A
Halogen	L220232A

Stand with double-joint arm

LED	L210236A
Halogen	L210232A

Stand with spring balance double-joint arm*

LED	L210235A
Halogen	L210231A

Fixed and height adjustable stand as singular item on page 36:

For technical data see provita.de

Series 3

The practical reading lamp

**Design & functionality,
perfectly connected.**

LED
Durable and low energy consumption

Light source	LED, 7 W
Light output	520 Lux / 500 mm
Light colour	approx. 2,700 K
Luminous flux	803 lm
Electrical mains	220 – 240 V, 50 – 60 Hz

Made in Germany

Upon request: international plug / 110 V version

Many mounting options and further accessories starting on page 36.

without external
room illumination

GOOSENECK ARM LAMP
Flexible positioning

Projection of the lamp	approx. 600 mm
Total weight	approx. 1.25 kg
Fixture pin	Ø 18, L 35 mm

LED

White	L320114A
Silver	L320114S

LED, with pull switch

White	L320214A
Silver	L320214S

optional:
International plug

For technical data see provita.de

Series 4

The stylish reading lamp

**Our best-seller
for comfortable reading.**

LED
**Long-live
High-Powered LED**

Light source	LED, 12 V / 3 W, 36°
Light output	1,870 Lux / 500 mm
Light colour	approx. 4,000 K
Luminous flux	230 lm
Electrical mains	100 – 240 V, 50 – 60 Hz

HALOGEN
**Economical
alternative**

Light source	Halogen reflector lamp with cold light reflector, 12 V / 10 W, 38°
Light colour	3,000 K
Luminous flux	520 lm
Electrical mains	230 V, 50 – 60 Hz

Made in Germany

Upon request: international plug / 110 V version
Many mounting options and further accessories starting on page 36.

GOOSENECK ARM LAMP
Flexible positioning

Projection of the lamp	approx. 600 mm
Switch	at lamp head
Total length	approx. 830[1] / 1,380[2] mm
Fixture pin	Ø 18, L 35 mm



LED short		Halogen short	
white	L400069A	**white**	L400025A
silver	L400069S	**silver**	L400025S

LED long		Halogen long	
white	L400079A	**white**	L400035A
silver	L400079S	**silver**	L400035S

optional:
with cord switch

For technical data see provita.de

innovative
& individual

Series 5

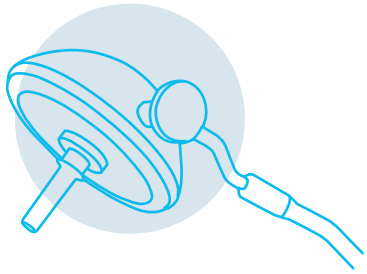

Our largest examination lamp

**Highest light quality,
exactly where needed.**

80,000 Lux

LED
Temperature monitored LED control

Light output	~ 80,000 Lux / 1,000 mm*
Light colour	approx. 4,500 K
Luminous flux	840 lm
Colour rendering index	RA 94
Dimming levels	50 % / 65 % / 85 % / 100 %

Keypad with dimmer switch and control light

Adjustable light intensity through a four-stage dimming function

compact,
maintenance-free,
central lighting unit

shadow and
glare-free in the
working area

easily removable,
sterilisable handle

flexible
positioning
& true to position

Version without dimmer

approx. 60,000 Lux / 720 lm

MOBILE EXAMINATION LAMP
Flexible use at any time

Pivoting radius	approx. 950 mm
Height adjustment	approx. 1,000 mm
Total weight	approx. 18.0 kg

With dimmer	L511120A
With UPS	L511125A
Without dimmer	L511130A

Optional: with UPS (uninterrupted power supply)

WALL MOUNTED EXAMINATION LAMP
True to position through cardanic

Pivoting radius	approx. 1,750 mm
Height adjustment	approx. 1,000 mm
Total weight	approx. 19.0 kg

With dimmer	L540066A
Without dimmer	L540076A

+ High-Light-quality, temperature-monitored "OSRAM LEDs" generate the primary light with very high colour rendering, long service life and consistent light quality.

+ Flexible positioning due to true position cardan suspension with integrated weight compensation.

CEILING MOUNTED EXAMINATION LAMP
Comfortable controllable

Pivoting radius	approx. 1,750 mm
Height adjustment	approx. 1,000 mm
Total weight	approx. 19.0 kg / 21.0 kg / 23.0 kg / 25.0 kg

For 2.5 m room height

With dimmer	L525067A
Without dimmer	L525077A

For 3.0 m room height

With dimmer	L530067A
Without dimmer	L530077A

For 2.7 m room height

With dimmer	L527067A
Without dimmer	L527077A

For 3.3 m room height

With dimmer	L533067A
Without dimmer	L533077A

The type of the ceiling lamp fastening must be determined by the customer. To clarify all technical details we would like to ask you to provide us with a sectional sketch of the room in the event of a project.

Our product consultants and technicians will be glad to assist you.

s. Substructure on p.13

+49 (0) 21 93 / 51 05 - 0

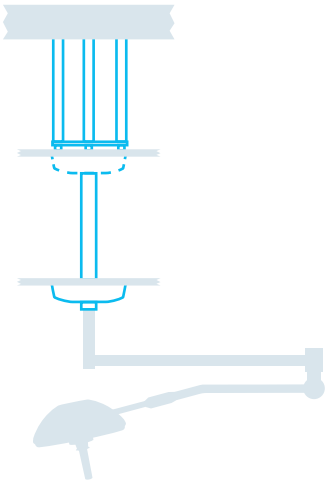

optional:
with ceiling mounting plate

Cover for ceiling lamp

Please order cover separately (Item no. Z2K0689A)

For technical data see provita.de

Series 6

The outstanding reading lamp

Smart design
with a strong reading light.

LED
Optimized thermal management and professional scattering optics

Light output	1,400 Lux / 500 mm
Light colour	6,000 K
Luminous flux	53 lm
Electrical mains	AC 100 – 240 V, 50 – 60 Hz

reddot award
honourable mention

high quality
LED bulb
"high power"
from OSRAM

highly flexible
protective hose
guarantees very good
hygienic properties

head made of
Stainless steel and
high-quality plastic

Made in
Germany

Upon request: international plug / 110 V version / connection to bed control / operation through power control.
Many mounting options and further accessories starting on page 36.

GOOSENECK ARM LAMP
Decent and flexible reading lamp

Lamp head angle of rotation 315°

Tab diameter 18 mm

Gooseneck arm long > A

White L600035A

Silver L600035S

Gooseneck arm short > B

White L600025A

Silver L600025S

Gooseneck arm angled >C

White L620025A

Silver L620025S

For technical data see provita.de

The lamp can be operated with any common available battery if the battery meets the following requirements:

- USB connection
- 5V direct current
- min. 550 mA
- CE

With USB network adapter

Changeable power supply adapter unit

Europe 272786

Australia 274234

UK 274243

USA / Japan 274252

China 274261

Standard version: European plug (272786). If a different changeable adapter is required, please specify country or plug type.

provita
provita

Series 1 - 6

The right accessories

Everything you need for installation.

HEIGHT ADJUSTABLE STAND
Flexible on a castor base

Colour	white and chrome-plated steel
Tube diameter	25/18 mm
Height adjustment	Single-handed system
Regulating range	1,080 mm – 1,745 mm
Base diameter	approx. 635 mm

S011820A

FIXED HEIGHT STAND
Versatile and stable

Colour	white
Tube diameter	25 mm
Fixture entry	Ø 18 mm
Base diameter	approx. 635 mm

S000803A

TUBE MOUNTING BRACKET
For fastening lamps to tubes, Ø 25 – 50 mm

Material	Aluminium
Bracket	Ø 18 mm
Weight	approx. 0.13 kg

White	Z2N0502A
Silver	Z2N0502S

OVAL-SHAPED WALL BRACKET

Low-noise rotation due to integrated plastic slide bush

Material	Aluminium, white coated
Bracket	Ø 18 mm
Size	55 × 156 mm
Distance between wall and fixture pin entry	120 mm
With threaded pin	Z2N0619A

TABLE CLAMP WITH QUICK HAND FASTENER

For quick and easy attaching of lamps on table tops

Material	Aluminium
Bracket	Ø 18 mm
Clamping range	15 – 32 mm
	Z2N0646S

COVER

Elegant cover for ceiling mounted lamps and possible ceiling gaps

Colour	white
Diameter	320 mm
Height	70 mm
Weight	approx. 0.5 kg
For ceiling lamps series 1	Z2K0679A
For ceiling lamps series 5	Z2K0689A

RAIL CLAMP

To attache lamps to 25 × 10 mm to 30 × 10 mm rails

Material	Aluminium, ball-polished
Fixture entry	Ø 18 mm
Weight	approx. 0.2 kg
With threaded pin	Z2N0643W

WALL MOUNTING BRACKET

For direct wall fastening of lamps, with 4 mounting holes

Material	Aluminium, white coated
Fixture entry	Ø 18 mm
Weight	approx. 0.2 kg
With threaded pin	Z2N0617A

For technical data see provita.de

You have further questions?

We will be glad
to help you personally.

Just give us a quick ring:
+49 (0) 21 93 / 51 05 - 0

Or e-mail us:
info@provita.de

For more than 50 years, our family business has been one of the leading manufacturers in medical technology.

personal

experienced

motivated

Our general terms and conditions apply. Errors, misprints and changes reserved.
© Copyright: provita medical gmbh & co. kg, October 2019
Reproduction as well as duplication, also in extracts, are not permitted without permission of provita medical.

provita medical

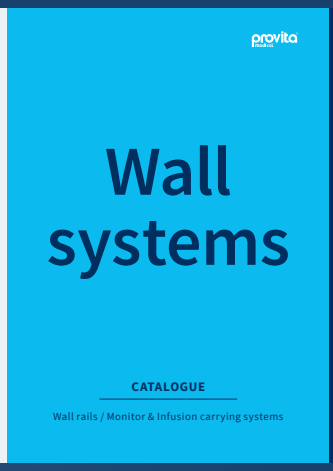

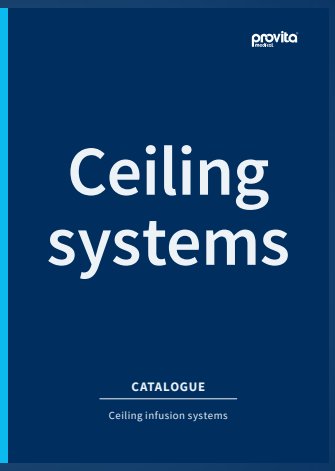

Version: 2019

Auf der Huhfuhr 8
42929 Wermelskirchen
Germany

Phone +49 (0) 21 93 / 51 05 - 0
Fax +49 (0) 21 93 / 51 05 - 269

info@provita.de
www.provita.de